




Performance

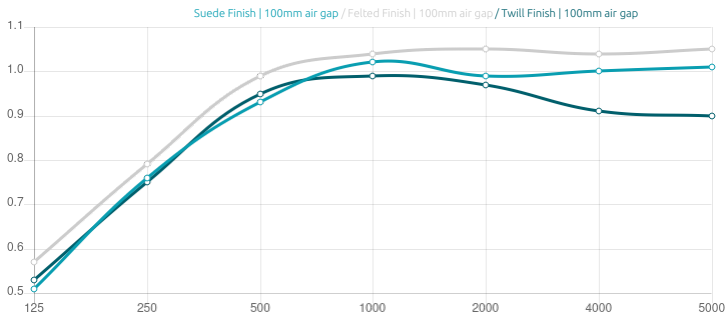

Technical Information

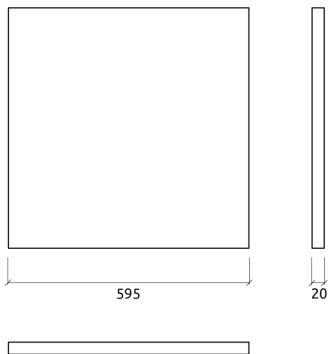

Features

Absorption Range: 315 Hz to 4000 Hz
Acoustic Class: A | (aw) = 0,9

Recycled PET absorption- Class 1 product according to the OEKO-TEX@ Standard 100.

This product is available in the following Fire Rates:
FG | Furniture Grade
FR | Fire Rated

PRODUCT COMPOSITION:

Aura F - Ceiling Tile | Suede Fabric Finishes (FG)
- Suede Acoustic Fabric
- Sound PET acoustic core - Euro Class B

Aura F - Ceiling Tile | Twill Fabric Finishes (FR & COVID-19 Safe)
- Twill Acoustic Fabric - COVID-19 Safe
- Sound PET acoustic core - Euro Class B

Aura F - Ceiling Tile | Felted Fabric Finishes (FR)
- Felted Acoustic Fabric
- Sound PET acoustic core - Euro Class B

* also available for imperial sized ceiling grids, upon request.

The PET core is a material made entirely from recycled PET plastic, that undergoes an environmentally-friendly transformation process into the non-woven acoustic core we use in this panel. To keep this process as efficient as possible, the thickness of the product may vary slightly (±3mm).

Dimensions:

- FG - SF | 595x595x20mm | 0.5 Kg
- FR - GP | 595x595x20mm | 0.48 Kg
- FR - TF | 595x595x20mm | 0.5 Kg
- FR - TT | 595x595x20mm | 0.5 Kg


Aura Fabric is made from recycled PET, a sustainable material with exceptional acoustic properties. This ceiling tile range offers a choice of quality acoustic fabric finishes. These minimalistic lightweight panels drop easily on standard European ceiling grids, granting fast and effortless installation.

Product finishes


(FG - SF) Suede Fabric Finishes




(FR - GP) Glazed PET Finish



(FR - TF) Twill Fabric Finishes | COVID-19 Safe (cleanable)

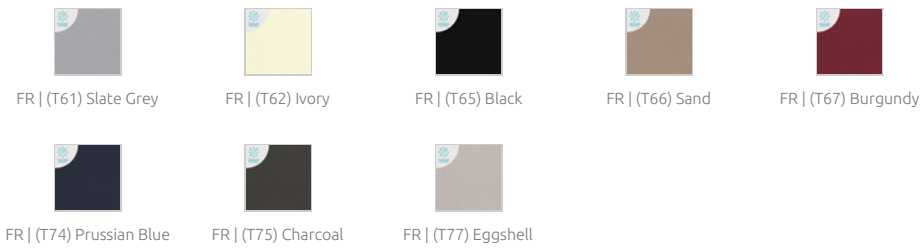

(FR - TT) Felted Fabric Finishes



Purpose

- RT Reduction
- Improving speech intelligibility
- High-frequency absorption

Recommended for

- Office
- Hospitality
- Public Spaces
- Conference Room
- Auditorium